

WILLIAMS

Our reputation is spreading

WILLIAMS EFFLUENT PUMP

Elba 3500 / 6500

This pump is specifically designed for effluent, is PTO driven and either trailer or 3 point linkage mounted. When combined with the **Williams Super Spider** range of traveling irrigators, it becomes an efficient unit for spreading high volumes of effluent or water from ponds and tanks.



Elba 6500 on trailer

- Overdrive gearbox
- 2 metres of 3" discharge hose
- 5 metres of 150mm suction hose
- Hand operated priming pump
- Double valved outlet
- 3.2 metre stirrer lance
- Camlocked outlet for the main line and the other for the recycling stirrer line and stirrer pipe
- 10 metre stirrer line
- Heavy duty PTO drive shaft
- Mechanical seal
- **NZ Designed and Manufactured**
- **Neat and tidy, simple to use**
- **Built to last**
- **Cost effective**

0800 4 EFFLUENT
(0800 4 33358)

www.williamsirrigation.co.nz



WILLIAMS EFFLUENT PUMP

Elba 3500 / 6500



An efficient unit when combined with the Williams Super Spider range of traveling irrigators.

- The ELBA series consists of an overgear and a centrifugal pump. Used for handling liquid sewage and liquids in general, it finds application sewage spreading.

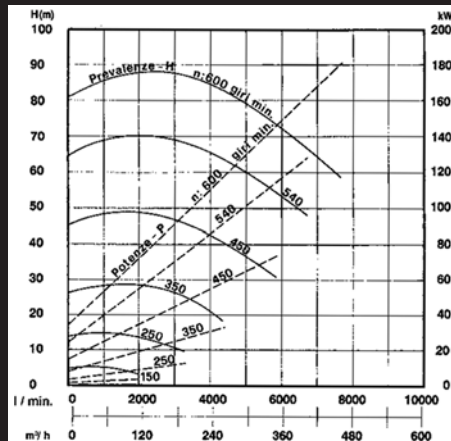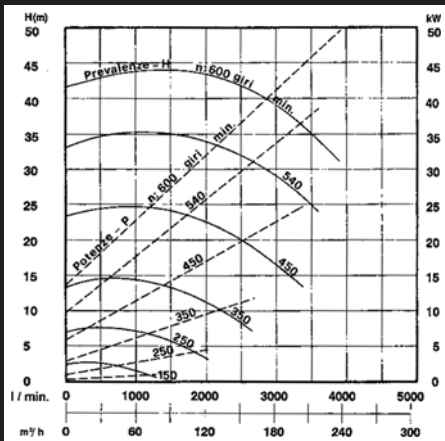

Specifications at 540 rpm

	Elba 3500	Elba 6500
Maximum capacity / litres / min	1600	2100
Maximum head / metres	40	60
Maximum absorbed power / kw	32	70
Gear ratio	1 : 4	1 : 4

Talk to us about your effluent spreading requirements and we can tailor make a system to suit your needs

Williams Engineering Ltd
Waitakaruru RD 6,
Thames, New Zealand

0800 4 EFFLUENT

Ph 07 867 3176

Fax 07 867 3179

Authorised Dealer